

CITIZEN

JavaPOS DRIVER 1.14

Setup Guide

For Ver. 1.14.0.1

CITIZEN SYSTEMS JAPAN CO., LTD.

Revision Record

Date	Version	Description
May 7, 2010	1.00	New issue
Oct 8, 2010	1.01	<ul style="list-style-type: none"> - Add Windows7-32bit to Supported Operating systems. - Add note about Java version. - Update as follows accompanied by memory switch change for printer setting; Add Full Col Print Change CBM1000-compatible mode
Apr 5, 2011	1.02	<ul style="list-style-type: none"> - The CT-S310II model was added to each item. - USB Interface Connection was changed.
Oct 31, 2011	1.11.2.6	<ul style="list-style-type: none"> - Version number is changed to same version as driver itself. - Added explanation of the tested Linux OS. - Added explanation of Java Virtual Machine. - Added explanation of USB Interface Connection of the Linux environment. - Release Notes and Library files were added to installation structure.
Mar 26, 2012	1.11.2.7	<ul style="list-style-type: none"> - The CD-S500 model was added to each item.
Mar 11, 2013	1.11.2.8	<ul style="list-style-type: none"> - Changed the installation files of this product. - Changed the jpos.xml setting examples.
Jan 17, 2014	1.11.3.0	<ul style="list-style-type: none"> - Added Windows8/8.1 to Operating systems. - Added CT-S281BT/BD to the supported models.
Feb 16, 2015	1.11.3.2	<ul style="list-style-type: none"> - The CT-S251, CT-S601II/651II/801II/851II model was added to each item.
Sep 30, 2015	1.11.3.3	<ul style="list-style-type: none"> - Added CT-S310II Ethernet to the supported models. - Added CD-S500 USB to the supported models of Linux. - Modified the access method to USB interface of Linux, deleted explanation of USB Connection of the Linux environment.
Nov 28, 2016	1.11.3.4	<ul style="list-style-type: none"> - Added Windows10 to Operating systems. - Added CT-D150/CT-E351 to the supported models.
Jun 13, 2017	1.11.3.5	<ul style="list-style-type: none"> - Added CT-D151/CT-E651 to the supported models.
Jan 7, 2019	1.14.0.1	<ul style="list-style-type: none"> - Supported JavaPOS1.14. - Added CT-S751, PMU2300III to the supported models. (Page 5,6,27)

Notes

1. Unauthorized use of all or any part of this document is prohibited.
2. The information in this document is subject to change without prior notice.
3. This document has been created with full attention. If, however, you find an error or question, please contact us.
4. We shall not be liable for any effect resulting from operation regardless of the above item 3.
5. If you do not agree with the above terms, you are not permitted to use this driver.

Trademark

Microsoft, Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries. (Official name for Windows is Microsoft Windows Operating System.)

Java is registered trademarks of Sun Microsystems, Inc. in the United States and/or other countries.

Company names and product names appearing on this document are trademarks and/or registered trademarks of respective companies.

CITIZEN is a registered trademark of Citizen Watch Co., Ltd.

Index

1. About the Product	5
2. Operating Environments	5
2.1. Operating System.....	5
2.2. Java Virtual Machine.....	5
2.3. Supported Models.....	5
2.4. USB Interface Connection of the Windows environment.....	7
3. Installation	8
3.1. Pre-Installation Instructions.....	8
3.2. Installation Steps for Windows.....	8
3.3. Installation Steps for Linux.....	12
3.4. How to use the Driver for windows.....	14
3.5. How to use the Driver for Linux.....	14
3.6. Setting of JavaPOS entry.....	15
4. Printer Setting	17
4.1. CT-D150 Series.....	17
4.2. CT-D151 Series.....	18
4.3. CT-E351 Series.....	19
4.4. CT-E651 Series.....	20
4.5. CT-S251 Series.....	21
4.6. CT-S281 Series.....	22
4.7. CT-S310 Series.....	23
4.8. CT-S310II Series.....	24
4.9. CT-S601/651/801/851 Series.....	25
4.10. CT-S601II/651II/801II/851II Series.....	26
4.11. CT-S751 Series.....	27
4.12. CT-S2000 Series.....	28
4.13. CT-S4000 Series.....	29

1. About the Product

This driver provides an open device driver architecture that can easily integrate the CITIZEN POS printer and the cash drawer connected to it by the POS system based on Java.

2. Operating Environments

2.1. Operating System

This driver supports the following operating systems.

- Windows XP, Windows7, Windows8, Windows8.1, Windows10
- Linux (32bit)

* Tested Linux OS: CentOS6.10, Ubuntu16.04

2.2. Java Virtual Machine

This driver supports the following 32bit Java Virtual Machine.

- Version 5 and higher

* Tested version: Version 5 Update 22, Version 6 Update 45, Version 7 Update 72

Version 8 Update 191

2.3. Supported Models

Supported models of this product and the corresponding interface are as shown below.

For details of each model, refer to the Printer User's Guide.

Windows environment

Series of Model	Supported Model	Interface	Printer Functions
CT-D150	CT-D150	Serial, USB, Ethernet	Standard
CT-D151	CT-D151	Serial, USB, Ethernet, Bluetooth	Standard
CT-E351	CT-E351	Serial, USB, Ethernet	Standard
CT-E651	CT-E651	Serial, USB, Ethernet, Bluetooth	Standard
CT-S251	CT-S251	Serial, USB, Ethernet, Bluetooth	Standard
CT-S281	CT-S281/281BT/281BD	Serial, USB, Bluetooth	Standard
	CT-S281-XL-M1	Serial, USB	Blackmark paper is supported
	CT-S281-XL		Label paper is supported.
CT-S310	CT-S310	Serial, USB, Ethernet	Standard (Paper with blackmark on front side is supported.)
	CT-S310-M1/M2		Paper with blackmark on back side is supported.
CT-S310II	CT-S310II	Serial, USB, Ethernet	Standard
CT-S601/651/801/851	CT-S601/651/801/851	Serial, USB, Ethernet	Standard
	CT-S801/851-M		Blackmark paper is supported
	CT-S801-L		Label paper is supported.

CT-S601II/651II/ 801II/851II	CT-S601II/651II/801II /851II	Serial, USB, Ethernet, Bluetooth	Standard
	CT-S801II/851II-M		Blackmark paper is supported
	CT-S801II-L		Label paper is supported.
CT-S751	CT-S751	Serial, USB, Ethernet, Bluetooth	Standard
CT-S2000	CT-S2000	Serial, USB, Ethernet	Standard
	CT-S2000-M		Blackmark paper is supported
	CT-S2000-L		Label paper is supported.
CT-S4000	CT-S4000	Serial, USB, Ethernet	Standard (Paper with blackmark on front side is supported.)
	CT-S4000-M		Paper with blackmark on back side is supported.
	CT-S4000-L		Label paper is supported.
PMU2300III	PMU2300III	Serial, USB	Standard (With presenter)


Linux environment

Series of Model	Supported Model	Interface	Printer Functions
CT-D150	CT-D150	Serial, USB, Ethernet	Standard
CT-D151	CT-D151	Serial, USB, Ethernet	Standard
CT-E351	CT-E351	Serial, USB, Ethernet	Standard
CT-E651	CT-E651	Serial, USB, Ethernet	Standard
CT-S251	CT-S251	Serial, USB, Ethernet	Standard
CT-S281	CT-S281/281BT/281BD	Serial, USB	Standard
	CT-S281-XL-M1		Blackmark paper is supported
	CT-S281-XL		Label paper is supported.
CT-S310	CT-S310	Serial, USB, Ethernet	Standard (Paper with blackmark on front side is supported.)
	CT-S310-M1/M2		Paper with blackmark on back side is supported.
CT-S310II	CT-S310II	Serial, USB, Ethernet	Standard
CT-S601/651/801/ 851	CT-S601/651/801/851	Serial, USB, Ethernet	Standard
	CT-S801/851-M		Blackmark paper is supported
	CT-S801-L		Label paper is supported.
CT-S601II/651II/ 801II/851II	CT-S601II/651II/801II /851II	Serial, USB, Ethernet	Standard
	CT-S801II/851II-M		Blackmark paper is supported
	CT-S801II-L		Label paper is supported.
CT-S751	CT-S751	Serial, USB, Ethernet	Standard
CT-S2000	CT-S2000	Serial, USB, Ethernet	Standard
	CT-S2000-M		Blackmark paper is supported
	CT-S2000-L		Label paper is supported.
CT-S4000	CT-S4000	Serial, USB, Ethernet	Standard (Paper with blackmark on front side is supported.)
	CT-S4000-M		Paper with blackmark on back side is supported.
	CT-S4000-L		Label paper is supported.
PMU2300III	PMU2300III	Serial, USB	Standard (With presenter)

2.4. USB Interface Connection of the Windows environment

Installation of printer driver is required when using this product with USB connection of the Windows environment. Perform the installation of Windows Driver. Designate USB Interface Port (Virtual Printer Port for USB) which is designated by the Windows Driver at JavaPOS Driver side.

This driver cannot be used with the status function (language monitor) of the Windows driver that shows the printer status. When using this driver, **install the Windows driver without the status function, or uncheck the "Enable bidirectional support" option under the Ports setting of the Windows driver.** (Need to reboot the computer in order for the changes to take effect.)

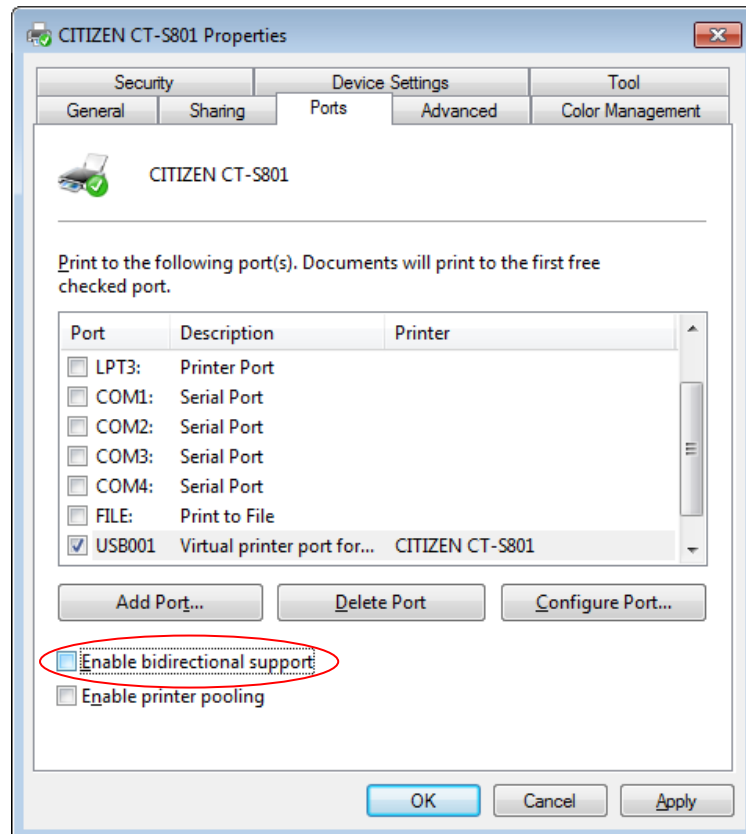

3. Installation

3.1. Pre-Installation Instructions

Please download the file according to your operating system from the URL below to get the latest Java for your computer and install the Java run time environment in your system.

Note that Java version 5 or higher is required.


<http://www.java.com/>

Before installation, shut down all applications in operation.


The installer should be run with Administrator (Windows) or root (Linux) privileges.

3.2. Installation Steps for Windows


- 1) The installer for Windows is "CSJ_JPOSxxxxx_setupEN.exe" (xxxxx is version number).
To run the installer, double click on it. After starting, follow the installation procedure in accordance with the dialog.
- 2) Setup wizard starts. Click [Next].

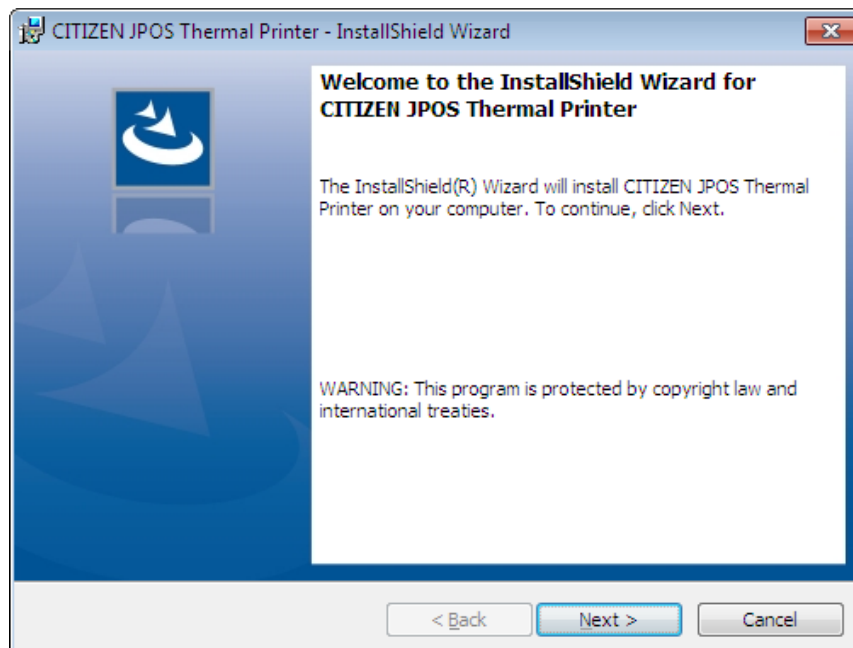


- 3) "License Agreement" window is displayed. If you agree with the product license agreement, select "I accept the terms in the license agreement" and click [Next]. If you do not agree with the product license agreement, select "I do not accept the terms in the agreement" and click [Next] to exit the wizard.

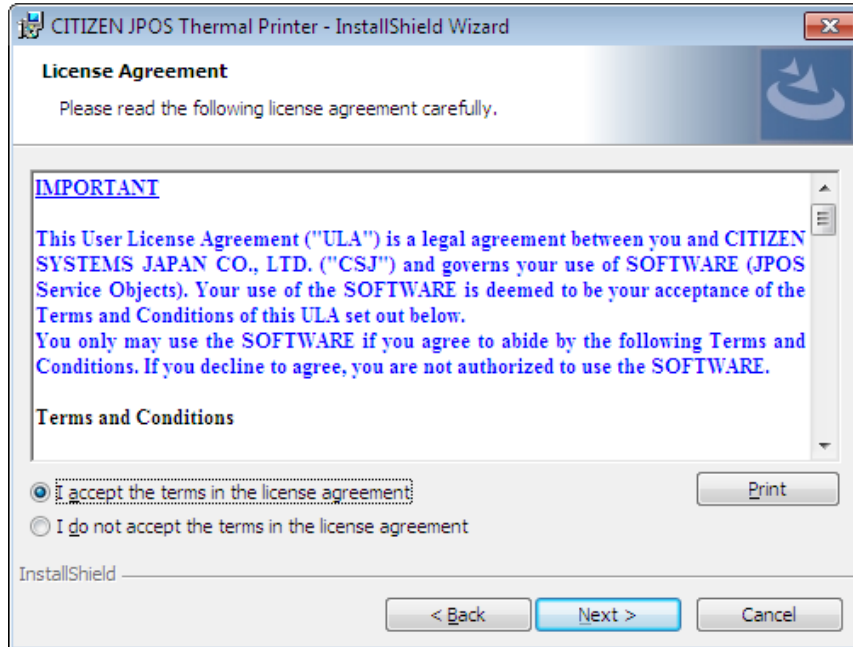


- 4) "Destination Folder" window is displayed. Specify the folder to install. If you use a default folder, click [Next]. If you want to change the folder, change the folder you want to install.

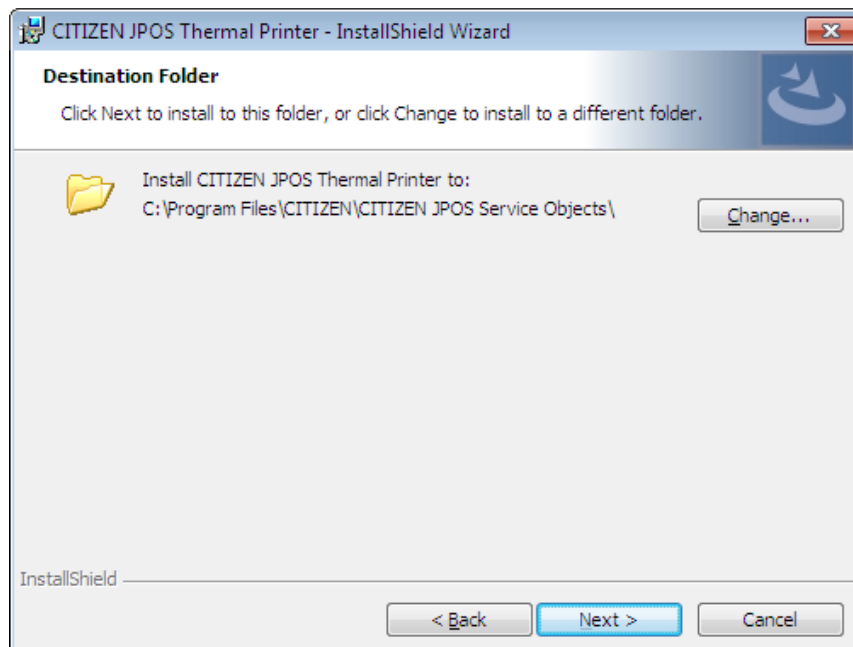


- 5) Click [Install] to begin the installation.

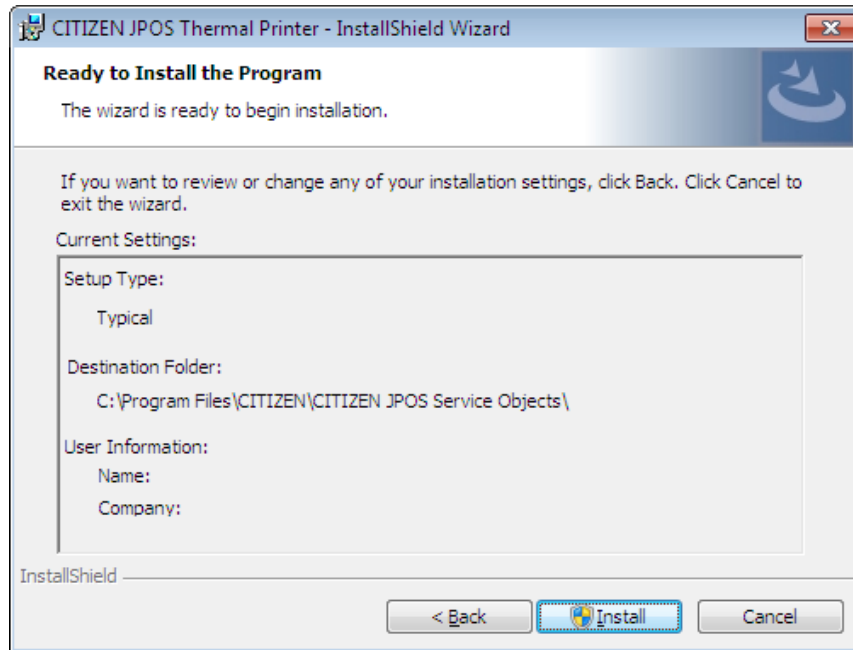

- 6) The installation progress status window is displayed. (It may take longer time to install depending on the environment or specifications of the terminal.)

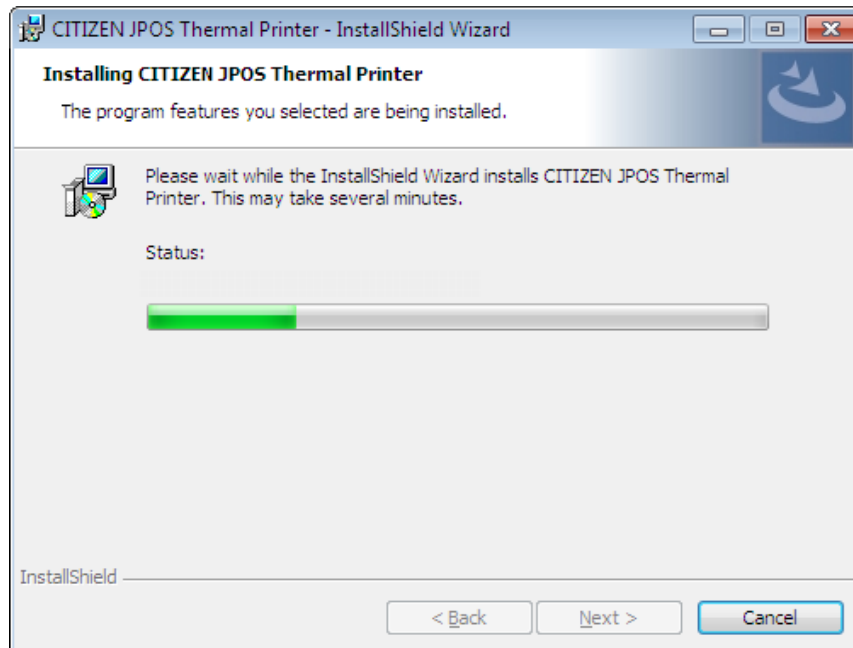

- 7) When the installation is successful, "Installation Completed" window is displayed. Click [Close].

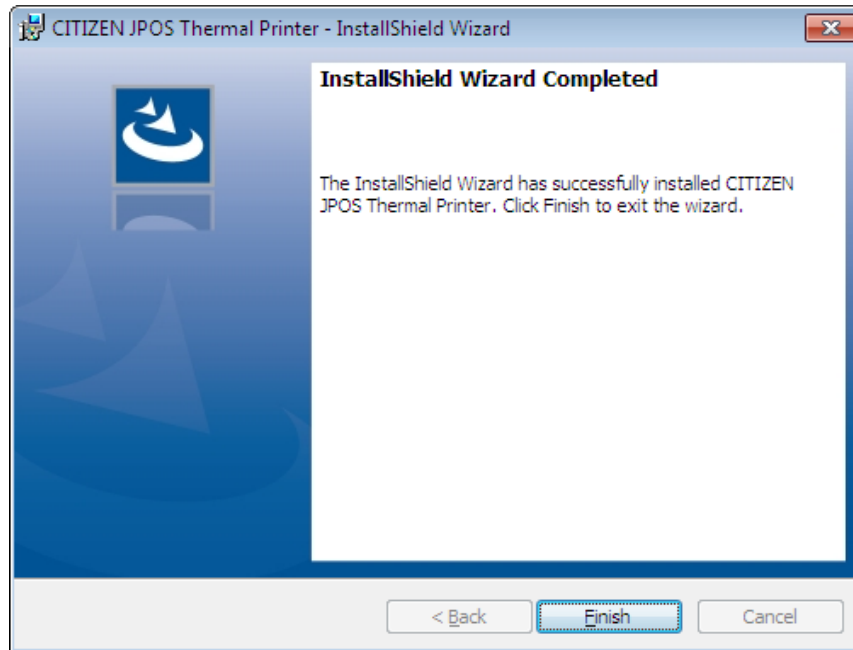

- 8) The following provides the description on the installation files of this product.


c:\program files\CITIZEN\CITIZEN JPOS Service Object (default)	
JPOSApplication.bat	: Test application execute file
JPOSConfig.bat	: Configuration (JCL) execute file
jpos.xml	: JavaPOS configuration file
CBMjpos.jar	: CITIZEN JavaPOS driver library
JPOSApplication.jar	: Test application library
jcl.jar	: jpos.config/loader (JCL) library
javapos-1.14.1.jar	: JavaPOS service object library
lib\comm.jar	: Library for driver
lib\jna.jar	: Library for driver
lib\xerces2.jar	: Library for driver
lib\xerces-2.6.0.jar	: Library for driver
lib\swing-layout-1.0.jar	: Library for test application
CSJjposBcw.dll	: Expansion library for driver
CSJjposCom.dll	: Expansion library for driver
win32com.dll	: Expansion library for driver
ReleaseNotes_EN.txt	: Release Notes file
Log	: Work folder for test application
Macro	: Work folder for test application
Sample	: Sample code folder

3.3. Installation Steps for Linux

- 1) The installer for Linux is "CSJ_JPOSxxxxx_setupEN.bin" (xxxxx is version number, self-extracting file). Please make sure the JAVA_HOME environment property is set to the Java runtime environment installation folder. To run the installer, open the terminal window, change to the directory in which the installer is located, and type "./CSJ_JPOSxxxxx_setpuEN.bin" (xxxxx is version number).

After starting, follow the installation procedure in accordance with the dialog.

- 2) Installer starts. Type the space key.

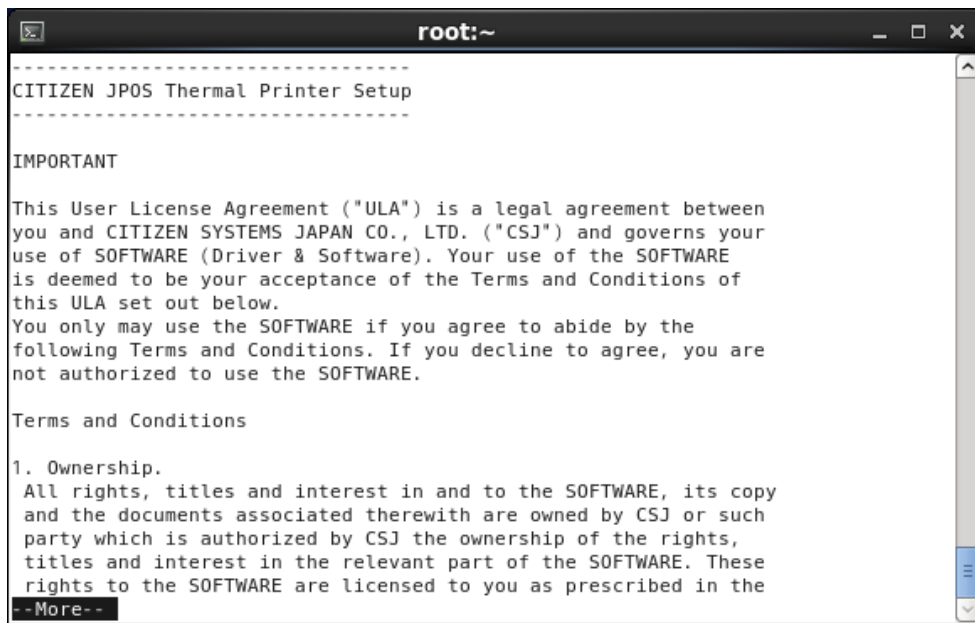

```
root:~
-----
CITIZEN JPOS Thermal Printer Setup
-----


IMPORTANT

This User License Agreement ("ULA") is a legal agreement between
you and CITIZEN SYSTEMS JAPAN CO., LTD. ("CSJ") and governs your
use of SOFTWARE (Driver & Software). Your use of the SOFTWARE
is deemed to be your acceptance of the Terms and Conditions of
this ULA set out below.
You only may use the SOFTWARE if you agree to abide by the
following Terms and Conditions. If you decline to agree, you are
not authorized to use the SOFTWARE.

Terms and Conditions

1. Ownership.
All rights, titles and interest in and to the SOFTWARE, its copy
and the documents associated therewith are owned by CSJ or such
party which is authorized by CSJ the ownership of the rights,
titles and interest in the relevant part of the SOFTWARE. These
rights to the SOFTWARE are licensed to you as prescribed in the
-More--
```

- 3) If you agree with the product license agreement, type "yes". If you do not agree with the product license agreement, type "no" to exit.

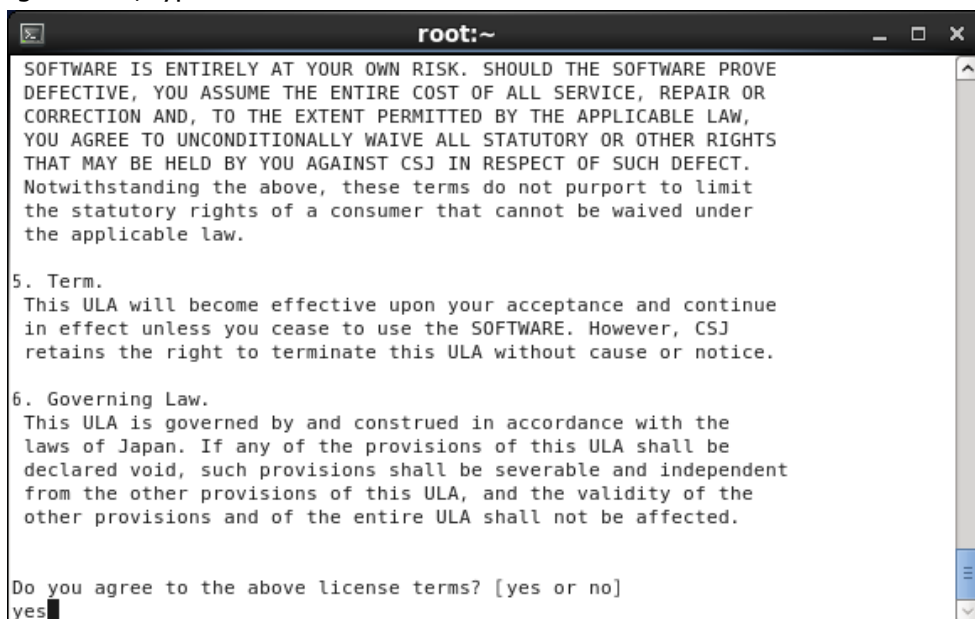

```
root:~
SOFTWARE IS ENTIRELY AT YOUR OWN RISK. SHOULD THE SOFTWARE PROVE
DEFECTIVE, YOU ASSUME THE ENTIRE COST OF ALL SERVICE, REPAIR OR
CORRECTION AND, TO THE EXTENT PERMITTED BY THE APPLICABLE LAW,
YOU AGREE TO UNCONDITIONALLY WAIVE ALL STATUTORY OR OTHER RIGHTS
THAT MAY BE HELD BY YOU AGAINST CSJ IN RESPECT OF SUCH DEFECT.
Notwithstanding the above, these terms do not purport to limit
the statutory rights of a consumer that cannot be waived under
the applicable law.

5. Term.
This ULA will become effective upon your acceptance and continue
in effect unless you cease to use the SOFTWARE. However, CSJ
retains the right to terminate this ULA without cause or notice.

6. Governing Law.
This ULA is governed by and construed in accordance with the
laws of Japan. If any of the provisions of this ULA shall be
declared void, such provisions shall be severable and independent
from the other provisions of this ULA, and the validity of the
other provisions and of the entire ULA shall not be affected.

Do you agree to the above license terms? [yes or no]
yes
```

- 4) When the installation is successful, installed places is displayed.

```

root:~
CSJ_JPOS11133_LinuxEN/libCSJjposCom.so
CSJ_JPOS11133_LinuxEN/lib/
CSJ_JPOS11133_LinuxEN/lib/jna.jar
CSJ_JPOS11133_LinuxEN/lib/LinuxCommAPI.jar
CSJ_JPOS11133_LinuxEN/lib/LinuxCommLib.jar
CSJ_JPOS11133_LinuxEN/lib/swing-layout-1.0.jar
CSJ_JPOS11133_LinuxEN/lib/comm.jar
CSJ_JPOS11133_LinuxEN/lib/xerces-2.6.0.jar
CSJ_JPOS11133_LinuxEN/lib/xerces2.jar
CSJ_JPOS11133_LinuxEN/libCSJjposBcw.so
CSJ_JPOS11133_LinuxEN/JPOSConfig.sh
CSJ_JPOS11133_LinuxEN/jcl.jar
CSJ_JPOS11133_LinuxEN/librxtxParallel.so
CSJ_JPOS11133_LinuxEN/jpos18-controls.jar
CSJ_JPOS11133_LinuxEN/JPOSApplication.sh
CSJ_JPOS11133_LinuxEN/Macro/

Done.

CITIZEN JPOS Service Objects was installed in the following places.

  /usr/local/CITIZEN/JPOS_Service_Objects

#

```

- 5) The following provides the description on the installation files of this product.

```

/usr/local/CITIZEN/JPOS_Service_Object
  JPOSApplication.sh      : test application execute file
  JPOSConfig.sh           : configuration (JCL) execute file
  jpos.xml                : JavaPOS configuration file
  CBMjpos.jar             : CITIZEN JavaPOS driver library
  JPOSApplication.jar     : Test application library
  jcl.jar                 : jpos.config/loader (JCL) library
  javapos-1.14.1.jar     : JavaPOS service object library
  lib/LinuxCommAPI.jar   : Library for driver
  lib/LinuxCommLib.jar   : Library for driver
  lib/comm.jar            : Library for driver
  lib/jna.jar             : Library for driver
  lib/xerces2.jar         : Library for driver
  lib/xerces-2.6.0.jar    : Library for driver
  lib/swing-layout-1.0.jar : Library for test application
  ReleaseNotes_EN.txt    : Release Notes file
  Log                     : work directory for test application
  Macro                   : work directory for test application
  Sample                  : sample code directory
$JAVA_HOME/lib/i386      (JAVA_HOME is the Java runtime environment installation folder)
  libCSJjposBcw.so       : Expansion library for driver
  libCSJjposCom.so       : Expansion library for driver
  librxtxParallel.so     : Expansion library for driver
  librxtxSerial.so       : Expansion library for driver

```

3.4. How to use the Driver for windows

Change to the Windows installation folder and double clicking the following file.

For starting the test application

JPOSApplication.bat

For starting the JPOS entry editor

JPOSConfig.bat

3.5. How to use the Driver for Linux

Open the terminal window and change to the Linux installation directory and type the following command on the command prompt.

For starting the test application

./JPOSApplication.sh

For starting the JPOS entry editor

./JPOSConfig.sh

3.6. Setting of JavaPOS entry

In order for Control Object to be connected to Service Object exactly and initialize the corresponding device, the JavaPOS control requires data of the jpos.xml file.

The following is the jpos.xml setting when it connects CT-S801II (printer) by Serial as an example. It is necessary to revise a value of "portName", "parity", "flowControl", "stopBits" and "baudRate".

```
<JposEntry logicalName="CITIZEN S801II Serial Windows">
  <creation factoryClass="jpos.loader.simple.SimpleJPOSServiceInstanceFactory"
    serviceClass="jpos.services.Citizen801IIPrinterServices"/>
  <vendor name="CITIZEN" url="http://www.citizen-systems.co.jp"/>
  <jpos category="POSPrinter" version="1.14"/>
  <product description="Jpos printer driver" name="CITIZEN CT-S801II POS printer"
    url="http://www.citizen-systems.co.jp"/>

  <prop name="WriteTimeout" type="String" value="5000"/>
  <prop name="portName" type="String" value="COM1"/>
  <prop name="PhysicalDevice" type="String" value="CITIZEN CT-S801II POS Printer"/>
  <prop name="dataBits" type="String" value="8"/>
  <prop name="PrinterLanguage" type="String" value="0"/>
  <prop name="parity" type="String" value="None"/>
  <prop name="flowControl" type="String" value="Hardware"/>
  <prop name="ResponseCheck" type="String" value="1"/>
  <prop name="stopBits" type="String" value="1"/>
  <prop name="Columns" type="String" value="48"/>
  <prop name="CharacterSet" type="String" value="437"/>
  <prop name="UseNVRAM" type="String" value="0"/>
  <prop name="Grayscale" type="String" value="0"/>
  <prop name="PaperModel" type="String" value="80mm"/>
  <prop name="deviceBus" type="String" value="RS232"/>
  <prop name="baudRate" type="String" value="19200"/>
</JposEntry>
```

The following is the jpos.xml setting when it connects CT-S801II (printer) by USB as an example. It is necessary to revise a value of "PortName".

```
<JposEntry logicalName="CITIZEN S801II USB Windows">
  <creation factoryClass="jpos.loader.simple.SimpleJPOSServiceInstanceFactory"
    serviceClass="jpos.services.Citizen801IIPrinterServices"/>
  <vendor name="CITIZEN" url="http://www.citizen-systems.co.jp"/>
  <jpos category="POSPrinter" version="1.14"/>
  <product description="Jpos printer driver" name="CITIZEN CT-S801II POS printer"
    url="http://www.citizen-systems.co.jp"/>

  <prop name="WriteTimeout" type="String" value="5000"/>
  <prop name="PhysicalDevice" type="String" value="CITIZEN CT-S801II POS Printer"/>
  <prop name="PortName" type="String" value="USB001"/>
  <prop name="PrinterLanguage" type="String" value="0"/>
  <prop name="ResponseCheck" type="String" value="1"/>
  <prop name="Columns" type="String" value="48"/>
  <prop name="CharacterSet" type="String" value="437"/>
  <prop name="UseNVRAM" type="String" value="0"/>
  <prop name="Grayscale" type="String" value="0"/>
  <prop name="PaperModel" type="String" value="80mm"/>
  <prop name="deviceBus" type="String" value="USB"/>
</JposEntry>
```

The following is the jpos.xml setting when it connects CT-S801II (printer) by Ethernet as an example. It is necessary to revise a value of "PortName" and "IPAddress".

```
<JposEntry logicalName="CITIZEN S801II Ethernet Windows">
  <creation factoryClass="jpos.loader.simple.SimpleJPOSServiceInstanceFactory"
    serviceClass="jpos.services.Citizen801IIPrinterServices"/>
  <vendor name="CITIZEN" url="http://www.citizen-systems.co.jp"/>
  <jpos category="POSPrinter" version="1.14"/>
  <product description="Jpos printer driver" name="CITIZEN CT-S801II POS printer"
    url="http://www.citizen-systems.co.jp"/>

  <prop name="WriteTimeout" type="String" value="5000"/>
  <prop name="PhysicalDevice" type="String" value="CITIZEN CT-S801II POS Printer"/>
  <prop name="PortName" type="String" value="IP_192.168.82.21"/>
  <prop name="PrinterLanguage" type="String" value="0"/>
  <prop name="PortNumber" type="String" value="9100"/>
  <prop name="ResponseCheck" type="String" value="1"/>
  <prop name="CharacterSet" type="String" value="437"/>
  <prop name="Columns" type="String" value="48"/>
  <prop name="UseNVRAM" type="String" value="0"/>
  <prop name="Grayscale" type="String" value="0"/>
  <prop name="PaperModel" type="String" value="80mm"/>
  <prop name="deviceBus" type="String" value="Ethernet"/>
  <prop name="IPAddress" type="String" value="192.168.82.21"/>
</JposEntry>
```


4. Printer Setting

Using this product assumes that the DIP switch and memory switch of the printer are set as shown below. For the details of the method of operating each switch and the content of setting, refer to User's Guide of each model.

4.1. CT-D150 Series

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON Info	Enabled	-
1-2	Buffer Size	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error	Character?	-
1-5	CR mode	Disabled	-
1-7	DSR signal (when serial I/F is used)	DSR	-
1-8	Init signal (when serial I/F is used)	-	-
2-2	Auto cutter	Enabled	-
2-4	Full Col Print	Wait Data	-
3-1	Resume Ctrr Err	L/F enabled	-
3-7	CBM1000 Mode	Compatible	-
3-8	Resume Open Err	Auto restore	-
4-8	Partial Only	Disabled	-
5-2	Line pitch	360 dots	-
6-1	Act. For Driver	Valid	-
7-6	DMA control	Enabled	-
8-4	Line Gap Reduce	Invalid	-
8-5	Reduced Char V/H	100% / 100%	-
9-1	Code page	Katakana	-
9-2	Int'Char Set	Japan	-
9-4	Multi-Byte Char	SJIS(CP932)	-

4.2. CT-D151 Series

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON Info	Enabled	-
1-2	Buffer Size	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error	Character?	-
1-5	CR mode	Disabled	-
1-7	DSR signal (when serial I/F is used)	DSR	-
1-8	Init signal (when serial I/F is used)	-	-
2-2	Auto cutter	Enabled	-
2-4	Full Col Print	Wait Data	-
3-1	Resume Ctrr Err	L/F enabled	-
3-7	CBM1000 Mode	Compatible	-
3-8	Resume Open Err	Auto restore	-
4-8	Partial Only	Disabled	-
5-2	Line pitch	360 dots	-
6-1	Act. For Driver	Valid	-
7-6	DMA control	Enabled	-
8-4	Line Gap Reduce	Invalid	-
8-5	Reduced Char V/H	100% / 100%	-
9-1	Code page	Katakana	-
9-2	Int'Char Set	Japan	-
9-4	Multi-Byte Char	SJIS(CP932)	-
13-6	Auto Reconnect (when Bluetooth I/F is used)	Invalid	-

4.3. CT-E351 Series

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON Info	Enabled	-
1-2	Buffer Size	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error	Character?	-
1-5	CR mode	Disabled	-
1-7	DSR signal (when serial I/F is used)	DSR	-
1-8	Init signal (when serial I/F is used)	-	-
2-2	Auto cutter	Enabled	-
2-4	Full Col Print	Wait Data	-
3-1	Resume Cctr Err	L/F enabled	-
3-7	CBM1000 Mode	Compatible	-
3-8	Resume Open Err	Auto restore	-
4-8	Partial Only	Disabled	-
5-2	Line pitch	360 dots	-
6-1	Act. For Driver	Valid	-
7-6	DMA control	Enabled	-
8-4	Line Gap Reduce	Invalid	-
8-5	Reduced Char V/H	100% / 100%	-
9-1	Code page	Katakana	-
9-2	Int'Char Set	Japan	-
9-4	Multi-Byte Char	SJIS(CP932)	-

4.4. CT-E651 Series

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON Info	Enabled	-
1-2	Buffer Size	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error	Character?	-
1-5	CR mode	Disabled	-
1-7	DSR signal (when serial I/F is used)	DSR	-
1-8	Init signal (when serial I/F is used)	-	-
2-2	Auto cutter	Enabled	-
2-4	Full Col Print	Wait Data	-
3-1	Resume Cctr Err	L/F enabled	-
3-7	CBM1000 Mode	Compatible	-
3-8	Resume Open Err	Auto restore	-
4-8	Partial Only	Disabled	-
5-2	Line pitch	360 dots	-
6-1	Act. For Driver	Valid	-
7-6	DMA control	Enabled	-
8-4	Line Gap Reduce	Invalid	-
8-5	Reduced Char V/H	100% / 100%	-
9-1	Code page	Katakana	-
9-2	Int'Char Set	Japan	-
9-4	Multi-Byte Char	SJIS(CP932)	-
13-6	Auto Reconnect (when Bluetooth I/F is used)	Invalid	-

4.5. CT-S251 Series

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON notify setting	Enabled	Enabled
1-2	Input buffer	4KB	4KB
1-3	Busy condition	Buffer full	Buffer full
1-4	Receiving error character	Character?	Character?
1-5	CR mode	Disabled	Disabled
1-7	Select DSR signal (when serial I/F is used)	DSR	DSR
1-8	Select INIT signal (when serial I/F is used)	-	-
2-2	Auto cutter operation	Enabled	Enabled
2-4	Full Col Print	Wait Data	Wait Data
3-1	Auto cutter restore	L/F enabled	L/F enabled
3-7	CBM1000-compatible mode	Compatible	Compatible
3-8	Cover opened while printing	Auto restore	Auto restore
4-8	Forced partial	Disabled	Disabled
5-2	Vertical basic calculation pitch	360 dots	360 dots
6-1	Act. For Driver	Valid	Valid
7-6	DMA control	Enabled	-
8-4	Line Gap Reduce	Invalid	-
8-5	Reduced Char	100% / 100%	-
8-6	Auto Side Shift	Invalid	-
9-1	Code page	Katakana	-
9-2	Foreign language characters	Japan	-
9-3	Kanji	Enabled	-
9-4	JIS/Shift-JIS	Shift-JIS	-
13-6	Auto Reconnect (when Bluetooth I/F is used)	Invalid	-

4.6. CT-S281 Series

DIP Switch Setting

DSW No.	Function	Setting	Description
8	INIT (when serial I/F is used)	OFF	Disabled

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON notify setting	Enabled	-
1-2	Input buffer	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error character	Character?	-
1-5	CR mode	Disabled	-
1-7	DSR signal (when serial I/F is used)	DSR	-
1-8	INIT signal (when serial I/F is used)	-	-
2-2	Auto cutter operation	Enabled	-
2-4	Full Col Print	WaitData	-
3-1	Auto cutter restore	L/F enabled	-
3-7	CBM270-compatible mode	compatible	-
3-8	Cover opened while printing	Auto restore	-
4-8	Full cut command	Full cut	-
9-1	Code page	Katakana	-
9-2	Foreign language characters	Japan	-
9-3	Kanji	Enabled	-
9-4	JIS/Shift-JIS	Shift-JIS	-
13-6	Auto Reconnect (when Bluetooth I/F is used)	Invalid	-

4.7. CT-S310 Series

DIP Switch Setting

DSW No.	Function	Setting	Description
8	INIT (when serial I/F is used)	OFF	Disabled

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON notify setting	Enabled	-
1-2	Input buffer	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error character	Character?	-
1-5	CR mode	Disabled	-
1-7	DSR signal (when serial interface is used)	DSR	-
1-8	INIT signal (when serial interface is used)	-	-
2-2	Auto cutter operation	Enabled	-
2-4	Full Col Print	WaitData	-
3-1	Auto cutter restore	L/F enabled	-
3-3	Parallel 31 Pin (when USB I/F are used)	Reset	-
3-7	CBM1000-compatible mode	Compatible	-
3-8	Cover opened while printing	Auto restore	-
4-8	Full cut command	Full cut	-
9-1	Code page	Katakana	-
9-2	Foreign language characters	Japan	-
9-3	Kanji	Enabled	-
9-4	JIS/Shift-JIS	Shift-JIS	-

4.8. CT-S310II Series

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON notify setting	Enabled	-
1-2	Input buffer	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error character	Character?	-
1-5	CR mode	Disabled	-
1-7	Select DSR signal (when serial I/F is used)	DSR	-
1-8	Select INIT signal (when serial I/F is used)	-	-
2-2	Auto cutter operation	Enabled	-
2-4	Full Col Print	WaitData	-
3-1	Auto cutter restore	L/F enabled	-
3-3	Parallel 31Pin (when USB I/F are used)	Reset	-
3-7	CBM1000-compatible mode	Compatible	-
3-8	Cover opened while printing	Auto restore	-
4-8	Forced partial	Disabled	-
5-2	Vertical basic calculation pitch	360 dots	-
6-1	Act. For Driver	Valid	-
7-6	DMA control	Enabled	-
8-4	Line Gap Reduce	Invalid	-
8-5	Reduced Char	100% / 100%	-
9-1	Code page	Katakana	-
9-2	Foreign language characters	Japan	-
9-3	Kanji	Enabled	-
9-4	JIS/Shift-JIS	Shift-JIS	-

4.9. CT-S601/651/801/851 Series

DIP Switch Setting

DSW No.	Function	Setting	Description
8	INIT (when serial I/F is used)	OFF	Disabled

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON notify setting	Enabled	-
1-2	Input buffer	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error character	Character?	-
1-5	CR mode	Disabled	-
1-7	Select DSR signal (when serial I/F is used)	DSR	-
1-8	Select INIT signal (when serial I/F is used)	-	-
2-2	Auto cutter operation	Enabled	-
2-4	Full Col Print	WaitData	-
3-1	Auto cutter restore	L/F enabled	-
3-3	Parallel 31Pin (when USB I/F are used)	Reset	-
3-7	CBM1000-compatible mode	Compatible	-
3-8	Cover opened while printing	Auto restore	-
4-8	Forced partial	Disabled	-
5-2	Vertical basic calculation pitch	360 dots	-
6-1	Act. For Driver	Valid	-
7-6	DMA control	Enabled	-
9-1	Code page	Katakana	-
9-2	Foreign language characters	Japan	-
9-3	Kanji	Enabled	-
9-4	JIS/Shift-JIS	Shift-JIS	-
10-3	ACK output timing (when USB I/F are used)	Before BUSY	-

4.10. CT-S601II/651II/801II/851II Series

DIP Switch Setting

DSW No.	Function	Setting	Description
8	INIT (when serial I/F is used)	OFF	Disabled

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON notify setting	Enabled	-
1-2	Input buffer	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error character	Character?	-
1-5	CR mode	Disabled	-
1-7	Select DSR signal (when serial I/F is used)	DSR	-
1-8	Select INIT signal (when serial I/F is used)	-	-
2-2	Auto cutter operation	Enabled	-
2-4	Full Col Print	WaitData	-
3-1	Auto cutter restore	L/F enabled	-
3-3	Parallel 31Pin (when USB I/F are used)	Reset	-
3-7	CBM1000-compatible mode	Compatible	-
3-8	Cover opened while printing	Auto restore	-
4-8	Forced partial	Disabled	-
5-2	Vertical basic calculation pitch	360 dots	-
6-1	Act. For Driver	Valid	-
7-6	DMA control	Enabled	-
8-4	Line Gap Reduce	Invalid	-
8-5	Reduced Char	100% / 100%	-
9-1	Code page	Katakana	-
9-2	Foreign language characters	Japan	-
9-4	Multi-byte Char	SJIS(CP932)	-
10-3	ACK output timing (when USB I/F are used)	Before BUSY	-
13-6	Auto Reconnect (when Bluetooth I/F is used)	Invalid	-

4.11. CT-S751 Series

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON Info	Enabled	-
1-2	Buffer Size	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error	Character?	-
1-5	CR mode	Disabled	-
1-7	DSR signal (when serial I/F is used)	DSR	-
1-8	Init signal (when serial I/F is used)	-	-
2-2	Auto cutter	Enabled	-
2-4	Full Col Print	Wait Data	-
3-1	Resume Ctrr Err	L/F enabled	-
3-7	CBM1000 Mode	Compatible	-
3-8	Resume Open Err	Auto restore	-
4-8	Partial Only	Disabled	-
5-2	Line pitch	360 dots	-
6-1	Act. For Driver	Valid	-
7-6	DMA control	Enabled	-
8-4	Line Gap Reduce	Invalid	-
8-5	Reduced Char V/H	100% / 100%	-
9-1	Code page	Katakana	-
9-2	Int'Char Set	Japan	-
9-4	Multi-Byte Char	SJIS(CP932)	-
13-6	Auto Reconnect (when Bluetooth I/F is used)	Invalid	-

4.12. CT-S2000 Series

DIP Switch Setting

DSW No.	Function	Setting	Description
8	INIT (when serial I/F is used)	OFF	Disabled

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON notify setting	Enabled	-
1-2	Input buffer	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error character	Character?	-
1-5	CR mode	Disabled	-
1-7	Select DSR signal (when serial I/F is used)	DSR	-
1-8	Select INIT signal (when serial I/F is used)	-	-
2-2	Auto cutter operation	Enabled	-
2-4	Full Col Print	WaitData	-
3-1	Auto cutter restore	L/F enabled	-
3-3	Parallel 31Pin (when USB I/F are used)	Reset	-
3-7	CBM1000-compatible mode	Compatible	-
3-8	Cover opened while printing	Auto restore	-
4-8	Forced partial	Disabled	-
5-2	Vertical basic calculation pitch	360 dots	-
7-6	DMA control	Enabled	-
9-1	Code page	Katakana	-
9-2	Foreign language characters	Japan	-
9-3	Kanji	Enabled	-
9-4	JIS/Shift-JIS	Shift-JIS	-
10-3	ACK output timing (when USB I/F are used)	Before BUSY	-

4.13. CT-S4000 Series

DIP Switch Setting

DSW No.	Function	Setting	Description
8	INIT (when serial I/F is used)	OFF	Disabled

Memory Switch Setting

MSW No.	Function	Setting	Description
1-1	Power ON notify setting	Enabled	-
1-2	Input buffer	4KB	-
1-3	Busy condition	Buffer full	-
1-4	Receiving error character	Character?	-
1-5	CR mode	Disabled	-
1-7	Select DSR signal (when serial interface is used)	DSR	-
1-8	Select INIT signal (when serial interface is used)	-	-
2-2	Auto cutter operation	Enabled	-
2-4	Full Col Print	WaitData	-
3-1	Auto cutter restore	L/F enabled	-
3-3	Parallel 31Pin (when USB I/F are used)	Reset	-
3-7	CBM1000-compatible mode	Compatible	-
3-8	Cover opened while printing	Auto restore	-
4-8	Forced partial	Disabled	-
5-2	Vertical basic calculation pitch	360 dots	-
5-5	Power OFF notify	Disabled	-
7-6	DMA control	Enabled	-
9-1	Code page	Katakana	-
9-2	Foreign language characters	Japan	-
9-3	Kanji	Enabled	-
9-4	JIS/Shift-JIS	Shift-JIS	-
10-3	ACK output timing (when USB I/F are used)	Before BUSY	-

CITIZEN JavaPOS DRIVER 1.14 Setup Guide

Jan 7, 2019 For Ver. 1.14.0.1

CITIZEN SYSTEMS JAPAN CO., LTD.

<http://www.citizen-systems.co.jp/>